



UWS Academic Portal

Charge-based supercapacitor storage estimation for indoor sub-mW photovoltaic energy harvesting powered wireless sensor nodes

Yue, Xicai ; Kiely, Janice; Gibson, Des; Drakakis, Emmanuel M.

Published in:

IEEE Transactions on Industrial Electronics

DOI:

[10.1109/TIE.2019.2896321](https://doi.org/10.1109/TIE.2019.2896321)

E-pub ahead of print: 25/03/2019

Document Version

Peer reviewed version

[Link to publication on the UWS Academic Portal](#)

Citation for published version (APA):

Yue, X., Kiely, J., Gibson, D., & Drakakis, E. M. (2019). Charge-based supercapacitor storage estimation for indoor sub-mW photovoltaic energy harvesting powered wireless sensor nodes. IEEE Transactions on Industrial Electronics. <https://doi.org/10.1109/TIE.2019.2896321>

General rights

Copyright and moral rights for the publications made accessible in the UWS Academic Portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

If you believe that this document breaches copyright please contact pure@uws.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.

Charge-Based Supercapacitor Storage Estimation for Indoor Sub-mW Photovoltaic Energy Harvesting Powered Wireless Sensor Nodes

Xicai Yue, Senior member, IEEE, Janice Kiely,
Des Gibson and Emmanuel M. Drakakis

Abstract— Supercapacitors offer an attractive energy storage solution for lifetime “fit and forget” photovoltaic (PV) energy harvesting powered wireless sensor nodes for internet of things (IoT) applications. Whilst their low storage capacity is not an issue for sub-mW PV applications, energy loss in the charge redistribution process is a concern. Currently there is no effective method to estimate the storage of the supercapacitor in IoT applications for optimal performance with sub-mW input. The existing energy-based method requires supercapacitor model parameters to be obtained and the initial charge state to be determined, consequently it is not suitable for practical applications. This paper defines a charge-based method, which can directly evaluate supercapacitor’s storage with straightforward calculations. Time constant analysis and experimental tests demonstrate that with the newly proposed method the manufacturer-specified tiny leakage current, although measured long after post-charge (e.g. 72 hours), can be directly used, making the storage estimation for a supercapacitor in IoT applications as simple as that for an ordinary capacitor. In addition, the demonstrated tiny leakage current at the required energy storage for a sub-mW PV powered IoT application enables a supercapacitor alone to be employed as the storage mechanism, thus achieving lifetime battery-replacement-free, self-powered IoT nodes.

Index Terms— supercapacitor, leakage current, self-discharge, charge redistribution, photovoltaic (PV), energy harvesting, internet of things, charge analysis, current-mode circuit analysis.

I. INTRODUCTION

Photovoltaic (PV) energy harvesting provides a potential solution for “fit and forget” self-powered autonomous

nodes used in wireless sensor networks (WSN) /Internet of things (IoT) applications, making it unnecessary to replace the battery over the product lifetime. It is estimated that there will be 45 billion WSN/IoT nodes existing in the world by 2020 [1]; therefore, a maintenance-free energy harvesting solution will soon become a very attractive solution since environmental and economic costs of replacing and maintaining batteries will be excessive.

For indoor IoT applications, such as smart buildings or independent living, environmental or physiological parameters often change slowly, so sensors located in the IoT nodes need to measure in minutes/hours/days rather than continuously. The power that an ambient energy harvester can produce might be lower than that required for an individual measurement, but the harvested energy can be continuously accumulated into energy storage components (such as a Lithium (Li) battery or a supercapacitor) so that a high power pulse can be supplied for a short-term measurement.

The power density of indoor PV energy harvesting devices ($10\sim 20\mu\text{W}/\text{cm}^2$) is much higher than that of RF ($0.1\mu\text{W}/\text{cm}^2$ for GSM, $0.001\mu\text{W}/\text{cm}^2$ for WiFi), making PVs the most suitable for indoor IoT applications. However, when considering that the energy harvested from a credit card size ($85\times 55\text{ mm}$) indoor PV panel is lower than 0.8 mW , either a Li-battery or a supercapacitor must be used in conjunction with the sub-mW indoor PV energy harvester to provide the required storage capacity.

The total number of recharge cycles for the lifetime of a Li-battery is several hundreds. Although a Li-battery/supercapacitor hybrid storage system can extend the battery lifetime, to some extent, by reducing battery peak discharge current, there is no guarantee that the requirements for lifetime “fit and forget” applications can be fully met when considering the limit on the number of recharge-cycles. By

Manuscript received May 01, 2018; revised September 26, 2018; accepted January 03, 2019. This work was supported in part by the Innovate U.K. under Grant contract 102156.

X. Yue is with the Faculty of Environment and Technology, Department of Engineering Design and Mathematics, University of the West of England, Bristol BS16 1QY, U.K. (phone 0044 117 3285208, e-mail: alex.yue@uwe.ac.uk).

J. Kiely is with the Institute of Bio-Sensing Technology, University of the West of England, Bristol BS16 1QY, U.K. (e-mail: janice.kiely@uwe.ac.uk).

D. Gibson is with the Gas Sensing Solutions, Glasgow G68 9HQ, U.K., and also with the Institute of Thin Films, Sensors and Imaging, University of the West of Scotland, Scottish Universities Physics Alliance, Paisley PA1 2BE, U.K. (e-mail: des.gibson@uws.ac.uk).

E. M. Drakakis is with the Department of Bioengineering, Imperial College London, London SW7 2AZ, U.K. (e.drakakis@imperial.ac.uk).

contrast, a supercapacitor can withstand millions of charge cycles (corresponding to an estimated 20 years lifetime [2, 3]), giving it a significant advantage as an energy storage solution for lifetime “fit and forget” IoT applications.

The energy loss caused by self-discharge of a supercapacitor [4] is a concern when using a supercapacitor alone, especially in sub-mW energy harvesting powered IoT applications. A method to calculate the storage energy loss during the charge redistribution process for energy-sensitive IoT applications has been identified [4]. It requires the use of a supercapacitor model, which is usually not directly available from the manufacturer, so further measurements are required to obtain the model parameters [5][6][7] and, most importantly, it requires the charge state of the supercapacitor (the initial conditions of the energy storage calculation[8][9][10]) to be known, making the method impractical. On the other hand, given that the storage of the supercapacitor can be evaluated via either the energy ($\frac{1}{2}CV^2$) or the charge (CV), a charge-based storage evaluation method may simplify the supercapacitor’s storage evaluation for PV powered IoT’s.

It has been reported that the self-discharge of the supercapacitor changes with time and is relatively high in the first hours after charging [11]. However, the available self-discharge related parameters provided by the manufacturer, such as the leakage current, is measured a relatively long time after charging, for example 2.0 μA leakage after 72 hours post charging for the 5.4V 0.5F supercapacitor from VinaTech. In IoT applications, the storage supercapacitor is repeatedly charged and discharged in every measurement period, which is highly unlikely to be longer than 72 hours.

The self-discharge current of the supercapacitor in an indoor PV energy harvesting application has been reported as being as high as a half of the average load current [12]. It has also been concluded that “using a supercapacitor alone as a long-term storage solution is unfeasible for sub-mW indoor PV energy harvesting applications” due to the high self-discharge rate of the supercapacitor [13]. Nevertheless, for a PV energy harvesting powered IoT node with supercapacitor storage, tested under solar irradiance of 100~440W/m² [14] (corresponding to tens of mA PV current), the μA self-discharge level of the supercapacitor was of no concern. However, for indoor applications when the illumination conditions are set as 200 lux (0.3 W/m²), a PV of the same size will produce a current in tens of μA , making it impossible to ignore the μA leakage current level of the supercapacitor. Recently, an indoor PV energy harvested IoT node using a supercapacitor alone as storage has been presented [15], which demonstrated that the dynamic leakage current of the supercapacitor is low for this application. This finding has been supported by a recent paper estimating the dynamic leakage current of supercapacitor in an IoT sensor node [16]. Therefore, if the leakage current of a supercapacitor is as low as reported, there is a possibility to use a supercapacitor alone as the storage in sub-mW indoor PV energy harvesting applications to provide a lifetime, battery replacement-free, solution.

This paper proposes a novel charge-based supercapacitor storage evaluation method to calculate the available storage in indoor PV energy harvesting powered IoT applications. This work was carried out during an Innovate UK project, looking at

smart air quality control in buildings using autonomous IoT nodes with a supercapacitor as the sole energy storage component. Section II describes the proposed charge-based storage evaluation method to be used when the power management strategy is focused on maintaining charge stored in the supercapacitor in order to ensure that the total charge to the supercapacitor is not smaller than the total discharge. Section III details the validation experiments demonstrating that the leakage current of the supercapacitor in an IoT application is the same as that of the manufacturer-specified value, so the charge stored in the supercapacitor can be directly calculated based on the newly proposed method. Section IV concludes the paper.

II. CHARGE-BASED STORAGE EVALUATION FOR A SUPERCAPACITOR

A. Charge redistribution caused energy loss

The capacitance, $C(t)$, of a supercapacitor is typically modelled by a leakage path of R_{leak} and a number of parallel RC branches [16]. The time constant (τ) to fully charge a supercapacitor is expressed as $\tau = \sum_{i=0}^n (C_i \times \sum_{j=0}^i R_j)$, where C_0 represents the capacitance formed near the electrodes and a larger n represents the equivalent components in a deeper branch.

Fig. 1 shows the charge/self-discharge profile of a supercapacitor, demonstrates that the supercapacitor is charged by a constant current to V_1 and then the terminal voltage of the supercapacitor exponentially drops to V_2 , caused by the charge redistribution process. This charge redistribution process transfers charge to deeper branches, making the capacitance of a post-charge supercapacitor increase with time to reach its nominal value at the end of the charge redistribution process. This is because at the end of charge redistribution process the current flow through the internal resistor R_n is almost zero, making all capacitors in the charge branches virtually be in parallel.

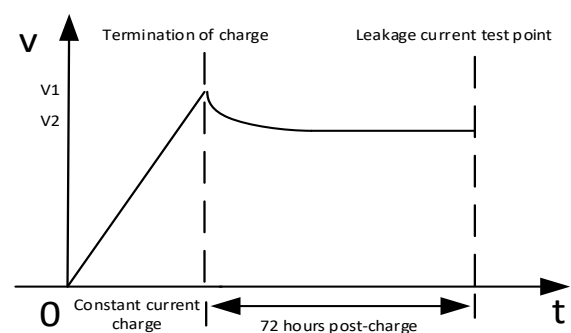


Fig . 1. Self-discharge of the supercapacitor

In IoT applications, the charge/discharge period, which is the entire measurement period including the active measurement phase and the sleep phase, is much shorter than 72 hours. As a result, the supercapacitor stays in the beginning of the charge re-distribution process for each measurement period, where the exponentially reducing terminal voltage corresponds to an exponentially varying current. When this current flows through the internal resistance of R_n , it causes stored energy loss. A simplified two stage supercapacitor model, shown in Fig. 2,

which accurately simulates several hours post-charge behaviour of the supercapacitor [17][18][19][20], has been used for storage estimation in an IoT process [4], where energy loss in the charge re-distribution process can be calculated as $\int_0^{t_0} i_1^2(t) R_1 dt$. However, this method is difficult to implement since the model parameters of a commercially available supercapacitor are unknown and the initial charge conditions are different from one application to another.

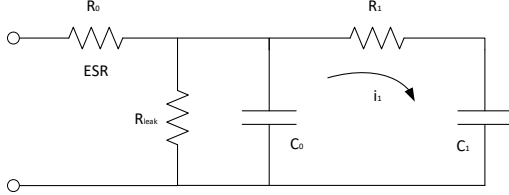


Fig. 2. Two stage supercapacitor model for energy loss estimation

B. Charge-based supercapacitor storage estimation

When a supercapacitor is used as the energy storage in IoT applications, the supercapacitor is repeatedly charged in sleep mode (denoted as T_1) and discharged in active mode (denoted as T_2) of every measurement period $T = T_1 + T_2$. The amount of charge stored in a supercapacitor can be calculated using the capacitance multiplied by the terminal voltage ($C \times V$), while the amount of the charge change can be calculated using the charge/discharge current multiplied by the charge/discharge time ($I \times t$). When the energy harvested is larger than that consumed in the period T , the supercapacitor has a net charge, so an unremitting terminal voltage increase can be observed for each period, otherwise the net discharge results in a decrease in terminal voltage.

To evaluate the amount of charge stored in the supercapacitor, the indoor PV energy harvesting powered IoT node is analysed in current-mode as shown in Fig. 3. The amount of charge change (ΔQ) of the supercapacitor in an entire measurement period can be written as,

$$\Delta Q = (I_{pv} - I_{leak} - I_{load}) \times T \quad (1)$$

where

$$I_{load} = \frac{I_{sleep} \times T_1 + I_{active} \times T_2}{T}$$

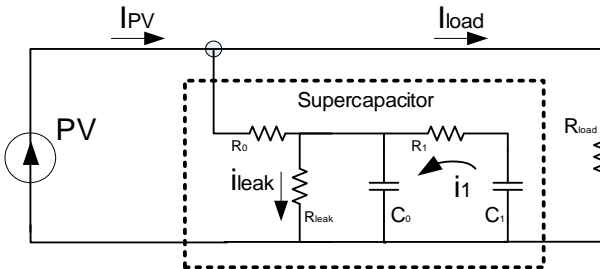


Fig. 3. Charge-based storage estimation for supercapacitor in IoTs

In sub-mW indoor PV powered IoT applications, the μA PV charge current in sleep mode does not cause an observable charge redistribution process, i.e. charge transfer between C_0 and C_1 . The tens of mA discharge current in active mode incur charge redistribution, a process that starts at the end of active mode; in view of this, the direction of the charge redistribution

current of i_1 shown in Fig. 3 is not the same as that shown in Fig. 2 where the charge redistribution process happens after charge. The charge reduction from C_1 at time t_0 of the charge redistribution process is $\int_0^{t_0} i_1(t) dt$, which is the same as the charge increased in C_0 , since the current to discharge the capacitor C_1 is the same as that to charge C_0 . Therefore, the total amount of charge stored does not vary. For charge redistribution, only the leakage path of R_{leak} in Fig. 3 should be considered in a charge-based storage evaluation; no other calculations are required.

Using formula (1) to calculate the charge stored in the supercapacitor for an IoT application seems straightforward: I_{load} is a known parameter for a specific application and I_{pv} is a known parameter for a given illumination condition. However, the manufacturer-provided I_{leak} is measured a long time post-charge and thus intuitively it seems hard to evaluate how this parameter can be directly used to calculate the charge stored in the supercapacitor, where it is charged/discharged in the much shorter measurement period.

The charge redistribution induced current $i_1(t)$ shown in Fig. 3 can be expressed as

$$V_0 - \frac{1}{C_0} \int i_1(t) dt - \left(V_1 - \frac{1}{C_1} \int i_1(t) dt \right) = i_1(t) R_1$$

$$i_1(t) = \frac{V_0 - V_1}{R_1} e^{-\frac{t}{R_1 C_2}}, \quad C_2 = \frac{C_0 C_1}{C_0 + C_1} \quad (2)$$

where V_0 and V_1 denote the voltages across capacitor C_0 and C_1 after charge which are charge history related ($V_0 < V_1$). When $t \gg \tau = R_1 C_2$, charge redistribution is completed resulting in $i_1(t) \approx 0$ and accordingly it holds,

$$V_0 = V_1, \quad C = \frac{C_0 V_0 + C_1 V_1}{V_0} = C_0 + C_1 \quad (3)$$

therefore, it is possible to obtain the leakage current of the supercapacitor via terminal voltage and the nominated capacitance C using $I_{leak} = C \times \Delta V / \Delta t$, where $\Delta t = t_2 - t_1$ and $t_1, t_2 \gg \tau$ to ensure the capacitance of the supercapacitor is the nominated one.

To demonstrate that the time constant of the charge redistribution is much smaller than the 72 hours (typical leakage current measurement time after charge [11]), the parameters of the supercapacitor models from the literature are listed in Table I. The calculated time constants for charge redistribution of the supercapacitor are within 10 minutes and therefore, when leakage current is measured by the manufacturer, no leakage current from the charge redistribution process is included in the measurement, due to the condition of $t \gg \tau$ (72 hours is hundreds times larger than the time constant of charge redistribution). Therefore the manufacture provided leakage figure is the I_{leak} value shown in Fig. 3 and in formula (1).

Table I: Time constant for charge redistribution of different supercapacitors

	$R_0 (\Omega)$	$C_0 (F)$	$R_1 (\Omega)$	$C_1 (F)$	$\tau (s)$
Ref [4]	66.7m	7.28	140	1.91	211.8
Ref [10]	48.3m	8.48	100	3.44	244.7
Ref [11]	0.46m	1.78K	1.98	0.18K	323.6

It is concluded that although the time duration of the charge redistribution process depends on the charge history (amount of charge, initial charge condition, etc), the charge redistribution process terminates far earlier than the end of the sleep period in sub-mW powered IoT applications [16]. This makes formula (1) a powerful tool for optimizing the PV powering system using $\Delta Q = C\Delta V$ at the end of sleep mode where C is the nominal value of the supercapacitor. Knowing the leakage current of the supercapacitor, the minimum measurement period at a given illumination, T_{\min} , can be calculated by setting $\Delta Q=0$ (can be inferred by $\Delta V=0$) in formula (1). Similarly, the minimum PV panel area can be calculated for a given measurement period, since the maximum total discharge (discharge for a measurement plus discharge in sleep mode) required for a whole measurement period is known in a specific application.

To summarize, the proposed charge-based storage estimation method can directly use the manufacturer provided leakage current to calculate the total charge stored, which entirely avoids the complicated calculation for energy loss during the charge redistribution process. Accordingly, this new method is generic for any IoT application since it is independent of the initial charge state and charge history of the supercapacitors.

III. VALIDATION EXPERIMENTS

The IoT node developed for building air quality control, shown in Fig. 4, is composed of a PV power supply, a microcontroller and the wireless link. When a low-power CO₂ gas sensor [21] is adopted to measure CO₂ levels every 150s, it requires 4.24mC total discharge (including active and sleep modes) in an entire measurement period [15]. The circuit diagram of the system, which employs a supercapacitor alone as the storage for indoor sub-mW PV energy harvesting power supply to achieve a lifetime battery-replacement-free solution, is shown in Fig. 5. At the recommended lowest indoor illumination level of 200 lux, the open-circuit voltage of the 50×20 mm indoor PV panel is 4.6V, while the short-circuit current is 45 μ A. The high PV output voltage makes it possible to directly store the PV harvested energy into a supercapacitor using a simple charger, in this case the LTC4071 from Linear Technology. V_H/V_L is the overcharge/over-discharge protection voltage. D_2 is a protection diode to stop the PV panel being charged by the 5.4V 0.5F VinaTech supercapacitor when the illumination condition is poor. R_0 is a charge current limitation resistor to protect the whole charge circuit.

According to the proposed charge-based storage evaluation method, the amount of charge from the PV (at 200lux) in an entire measurement period can be calculated as $45\mu A \times 150s = 6.75mC$, the leaked charge can be calculated as $2\mu A \times 150s = 0.3mC$, and the known amount of discharge from the load is 4.24mC, so the net charge in a measurement period is calculated as $6.75 - 0.3 - 4.24 = 2.21$ (mC), corresponding to a terminal voltage increase of $2.21mC / 0.5F = 4.42mV$ for each measurement period. Experiments carried out to validate the above calculation, by recording and analysing the terminal voltage of the supercapacitor, are described below.



Fig. 4. The developed 70 × 50 × 20 mm autonomous IoT node for building ventilation: on the left image the window area is the mounted PV energy harvesting power supply, while on the right image the sensor mounted can be seen on the left hand-side, and the microcontroller (red board) on the right. The green radio board sits on top of the microcontroller

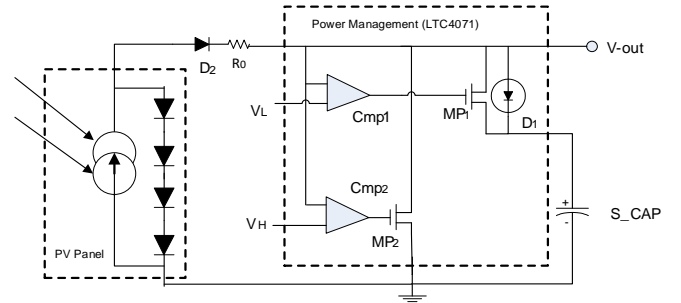


Fig. 5. Supercapacitor employed for energy storage with overcharge and over-discharge protections.

A. Leakage current validation

The key point of the newly proposed method is that the leakage current of the supercapacitor in an IoT application is the same as the manufacture specified one. To validate this, the circuit shown in Fig. 5 has been attached to a simulated IoT load as shown in Fig. 6 so that the amount of discharge by the load can be obtained via recording the terminal voltage of the supercapacitor. The simulated load contains two load resistors, $R_1 = 200\Omega$ for active mode, and $R_2 = 1M\Omega$ for sleep mode. A mode switch connects the supercapacitor to its load; it is controlled to respond at a measurement timing of 250ms active mode in a 150s total measurement period, corresponding to the timing for practical CO₂ measurements.

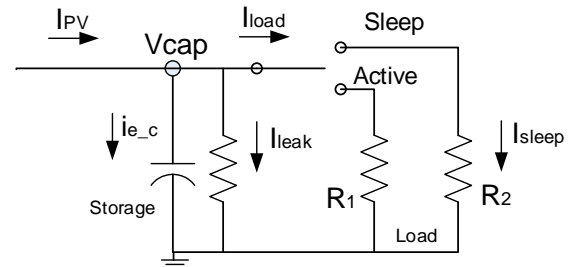


Fig. 6. Simulated resistive load for leakage current validation. With the recorded terminal voltage V_{cap} , the supercapacitor discharged by the load in an entire measurement period can be obtained experimentally.

The idea of this experiment is that by using the recorded terminal voltage, the amount of discharge (Q_{dis}) of the supercapacitor in a measurement period can be expressed as

$$Q_{dis} = \frac{\int_{t_1}^{T_{2-s}} v_{cap}(t)dt}{R_2} + \frac{\int_{T_{2-s}}^{T_{2-e}} v_{cap}(t)dt}{R_1} + \frac{\int_{T_{2-e}}^{T-t_1} v_{cap}(t)dt}{R_2} \quad (4)$$

where t_1 is the measurement start point in sleep period, T_{2-s} and T_{2-e} are start and end the active mode ($T_{2-e} - T_{2-s} = T_2$).

The amount of charge change ΔQ in a measurement period can be expressed by

$$\Delta Q = C(T + t_1)v_{cap}(T + t_1) - C(t_1)v_{cap}(t_1) \quad (5)$$

where the variation of the capacitance of the supercapacitor $C(t)$ in formula (5) is reflected by terminal voltage change of the supercapacitor. When t_1 in formula (5) is selected in sleep mode, the effective charge current $I_{e-c} = I_{pv} - I_{sleep} - I_{leak}$ (shown in Fig. 6) is a constant, so the capacitance of the supercapacitor can be expressed as,

$$C(t) = \frac{dQ}{dV_{cap}(t)} = \frac{I_{e-c}dt}{dV_{cap}(t)} = \frac{(I_{pv} - I_{sleep} - I_{leak})}{\frac{dV_{cap}(t)}{dt}} \quad (6)$$

where $\frac{dV_{cap}(t)}{dt}$ is the terminal voltage change with time. If the recorded terminal voltage change of $\frac{dV_{cap}(t)}{dt}$ is a constant, $C(t)$ will be a constant so the charge redistribution process should be completed and it holds $C(T + t_1) = C$ and $C(t_1) = C$ (C is the nominal capacitance). Therefore formula (5) becomes,

$$\Delta Q = C(T + t_1)v_{cap}(T + t_1) - C(t_1)v_{cap}(t_1) = C[v_{cap}(T + t_1) - v_{cap}(t_1)] = C\Delta v_{cap} \quad (7)$$

This makes ΔQ an obtainable figure. Combining formulae (1), (4) and (7), the target of experimentally acquiring the leakage current of the supercapacitor in IoT applications can be achieved.

1). Experiment set-up

To obtain leakage current in μA accuracy, the recorded terminal voltage of the supercapacitor should be less than $V_{min}\{1.0 \mu A \times 200 \Omega, 1 \mu A \times 1 M\Omega\} = 0.2 \text{ mV}$. The minimum voltage recording duration Δt has been determined in T_1 as $\Delta t \leq 4.5 \text{ ms}$ from $V = v_0 e^{-\frac{t}{R_2 C}}$, $\left|\frac{dV}{dt}\right| \Delta t = \frac{v_0}{R_2 C} e^{-\frac{t}{R_2 C}} \Delta t \leq \frac{v_0}{R_2 C} \Delta t \leq 0.2 \text{ mV}$, where V_0 is selected as 4.2 V (the V_H in Fig.5), R_2 is 200Ω and $C = 0.5 \text{ F}$.


The timing signal of 250ms for active mode and 149.75 s for sleep mode has been created using a signal generator to control the mode switch in Fig. 6, as well as to trigger the 4-channel oscilloscope (MSO9064A), which runs in segmented memory mode to record the required voltage data. The high resolution mode (12 bits) of the oscilloscope is selected. The data recording sample rate is set as 2 KSPS rather than the required 250 SPS (calculated from the minimum 4.5 ms sampling period) allowing data averaging to improve the signal to noise ratio (SNR). The indoor PV panel has been illuminated at 200lux and the PV current is recorded using a Keithley 2450 SourceMeter. Additionally, the trigger signal is recorded as the timing reference.

2). Results

Supercapacitor voltage segments in 45 successive periods are recorded as shown in Fig. 7(a). Curves from the bottom to the top correspond to period numbers 1 to 45, demonstrating that the energy harvested is larger than that consumed in each period. Each curve start point ($t=0$) corresponds to the measurement point at 150 ms, just before the end of sleep mode, and the voltage drop observed is due to the internal resistance of the power supply when the mode switch turns on to active mode. Similarly, a voltage jump is seen when the mode switch turns off. Note that the starting voltage of each curve is the voltage at the end of previous charge period. The voltage of each curve at 100 ms has been plotted in Fig.7(b) as the blue curve (marked with “o”). This shows an increasing voltage after each entire measurement period. The linear relationship implies that the net charge change to the capacitor in every measurement period is almost the same. The PV supplied charge current is shown as the red curve (marked with “□”) in Fig. 7(b) as well. The recorded PV current changes are smaller than $0.6 \mu A$ within 2 hours when the supercapacitor voltage changes from 3.703 V to 3.817 V, verifying that PV current during the recording period can be treated as a constant of the mean value of $44.9 \mu A$. Since the employed oscilloscope has an input impedance of $1 M\Omega$, a leakage path with $1 M\Omega$ resistance in parallel with the supercapacitor in Fig. 6 is included for later leakage current calculation.

The linearity of the terminal voltage (0 ~ 350 ms in Fig. 7(a)) was examined, as shown in Fig. 7(c); it shows the voltage difference after 40 consecutive periods to reduce the measurement noise effects, and it demonstrates that before the end of the sleep mode, the voltage change is constant. Since this constant voltage change period is observed before the end of sleep mode, it implies that the supercapacitor is in a steady state with the nominal capacitance. In contrast, the voltage change in active mode (from 150 ms to 350 ms in Fig. 7(c)) is not constant, indicating a capacitance change period.

The terminal voltage change at before the end of sleep mode has been used for charge calculation. The experimental results and the leakage current calculated using $C = 0.5 \text{ F}$ at $t_1 = 100 \text{ ms}$ in Fig. 7(a) are shown in Table II. It shows that the measured average leakage current ($1.8 \mu A$) is almost the same as that specified by the manufacturer ($2.0 \mu A$). Therefore, the key point of the proposed method, that leakage current of the supercapacitor in IoT applications is the same as the manufacture specified one, has been validated experimentally.

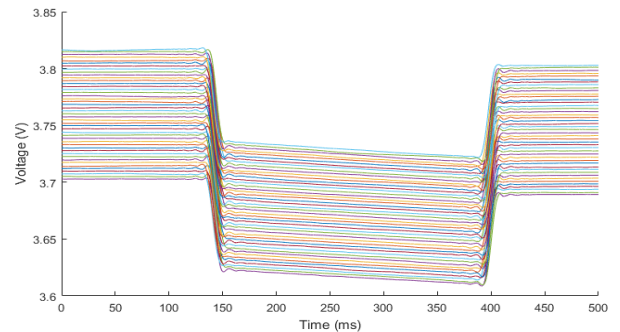

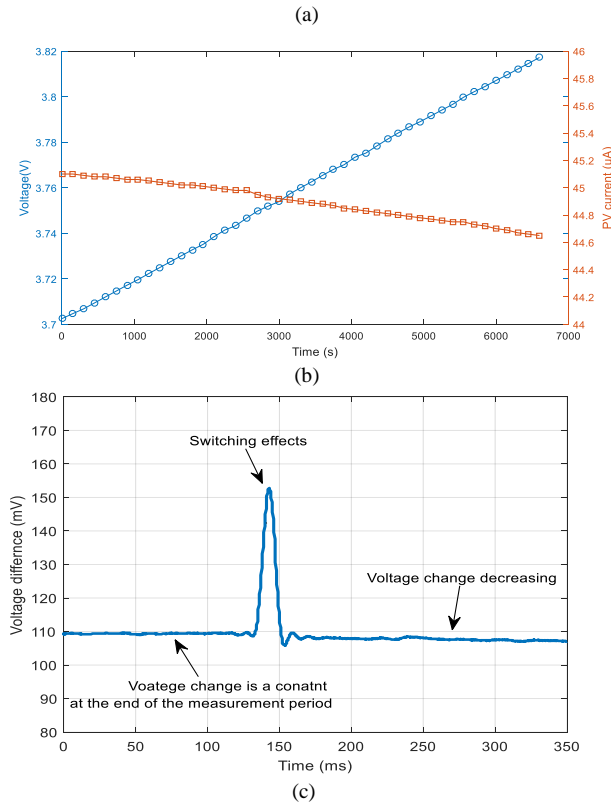


Fig 7. (a) Measured raw data of the terminal voltage of the supercapacitors in 45 successive periods; (b) the voltages of each period at 100 ms (blue curve) and the output current of the PV energy harvester (red curve); and (c) the linearity check

Table II: Parameter summary during 45 measurement periods

Active period (T_1)	250 ms
Sleep period (T_2)	149.75 s
Supercapacitor voltage1 (start)	3.71 V
Supercapacitor voltage2 (stop)	3.82 V
Total charge/ I_{pv} from PV	296.3 mC / 44.9 μA
Capacitor saved charge/ I_{e_c}	57 mC / 8.6 μA
Total discharge / I_{load}	224.4 mC / 34.0 μA
Leaked charge/total leakage current	14.9 mC / 2.3 μA
Typical supercapacitor leakage current	1.8 μA

Table III: Comparison of proposed calculation and experiment results

	Proposed calculation (first period)	Experiment results (average of 45 periods)
PV current	45 μA (specified)	44.9 μA
I_{load}	$\frac{3.703 \times 149.75 + 3.703 \times 0.25}{200} = 34.5 \mu A$	34.0 μA
I_{leak}	2.0 μA (specified)	1.8 μA
I_{e_c}	$(45 - 34.5 - 2) \mu A = 8.5 \mu A$	8.6 μA
ΔV	$150s \times 8.5 \mu A / 0.5F = 2.54 mV$	$(3.817 - 3.703)V / 45 = 2.53 mV$

A full comparison between the calculated results acquired through the proposed method and the experimentally measured results is listed in Table III. The first measurement period, where the terminal voltage of the supercapacitor is set at 3.703V and the PV supplied current is 45 μA, has been used for calculations performed in accordance with the proposed method. The I_{load} has been calculated using formula (1), and the ΔV is calculated using $I_{e_c} \times T = C \times \Delta V$. The calculated terminal

voltage increase after a measurement period is 2.54mV, which represents a 0.4% difference from the average of 2.53mV calculated using the 45 measurement periods shown in Fig.7 (b) (voltage increased from 3.703V to 3.817V), demonstrating that the proposed method can be used for charge storage estimation in supercapacitor's IoT applications.

B. Validation through a practical IoT application

CO₂ concentration measurements, using the indoor PV energy harvesting powered autonomous IoT sensor nodes shown in Fig. 4, have been carried out for further validation of the proposed method, since the leakage current of the supercapacitor listed in Table II is a "typical" value obtained by using the maximum quiescent current (0.5 μA) of the power management chip of LTC4017. In this experiment, the terminal voltage increase of the supercapacitor was measured after an entire measurement period so that the supercapacitor leakage current and the quiescent current of the power management chip could be taken into account as a whole.

During the validation, the sensor node was being set in active mode for 250ms in every 150 s when the indoor PV energy harvester was illuminated at 200 lux. The Keithley DMM7510 multimeter was recording the supercapacitor terminal voltage at 100ms before the end of sleep mode of each measurement period as shown in Fig. 8(a). This demonstrated that the terminal voltage of the supercapacitor increased from the pre-charged 4.099V to the pre-set over-charge protection voltage of 4.195V in 80 measurement periods.

The curve shown in Fig. 8(a) is composed of three parts. In the first 14 measurement periods, the terminal voltage increases almost linearly. This is then followed by a non-linear voltage increase area until the period 61, and finally the terminal voltage is fixed at 4.195V during the rest of periods due to the overcharge protection. The average effective charge current for the first 14 periods is calculated as $\frac{C\Delta V}{14T} = 9.76 \mu A$. When considering that the known total load discharge is 4.24 mC in the 150 s measurement period, corresponding to a discharge current of 28.3 μA, it seems that the experimentally obtained leakage current of the supercapacitor of $[45 \mu A \text{ (PV charge current)} - 28.3 \mu A \text{ (load consumed current)} - 9.76 \mu A \text{ (effective charge current)}] = 6.94 \mu A$ is much higher than that of manufacture specified of 2.0 μA. This result seems conflicting to the validated result in Section III.A wherein the leakage current of a supercapacitor in an IoT application is the same as that specified by the manufacturer. The explanation is that in the measured I-V curve of the adopted PV panel (shown in Fig. 8(c) and Fig. 8(d)), the constant PV output current (the linear parts shown in Fig. 8(c) and the flat parts shown in Fig. 8(d)) exists only before the operating voltage of the PV reaches its maximum power point. The maximum power point of the adopted PV at 200 lux is 4.17 V (as shown in Fig. 8(c)), while the averaged supercapacitor voltage in the first 14 periods shown in Fig. 8(a) is 4.1 V. Since there is a 0.2 V voltage drop on the diode (shown in Fig. 5), the actual PV operating voltage in this experiment is 4.3 V (4.1 V supercapacitor voltage plus a 0.2V diode voltage drop), corresponding to a 40.2 μA PV current, shown in Fig. 8(d). The actual leakage current of the supercapacitor obtained by this experiment should be updated as $[40.2 \mu A \text{ (PV charge current)} - 28.3 \mu A \text{ (load consumed$

current) – 9.76 μA (effective charge current)] = 2.14 μA (including the quiescent current of LTC4017), which is similar to the total leakage current of 2.3 μA listed in Table II.

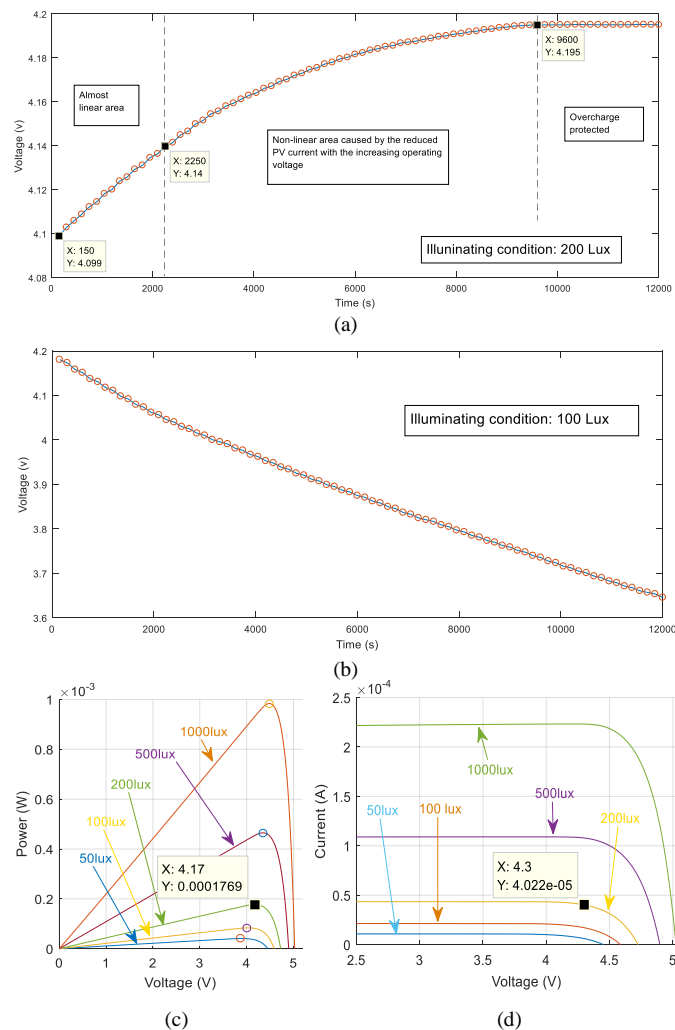


Fig. 8. Terminal voltage of supercapacitor recorded at the end of sleep mode for IoT based CO₂ measurements. (a) The increasing voltage at 200 lux illumination demonstrates that the charge is larger than the discharge of the supercapacitor in every measurement period. (b) The decreasing voltage at 100 lux illumination demonstrates that the charge is smaller than discharge. (c) Power output of the adopted PV showing a maximum power point of 4.17V at 200 lux (d) Measured I-V curve showing a reduced PV current when operating voltage is over the maximum power point.

Since the PV current at operating voltage of 4.3 V is 40.2 μA , the amount of charge from PV should be updated as $[40.2 \mu\text{A} \times 150 \text{ s}] = 6.03 \text{ mC}$. The calculated voltage increase at the beginning of Section III should be updated as $[(6.03 - 4.24 - 2.14 \times 0.15) \text{ mC} / 0.5] = 2.94 \text{ mV}$, which is almost the same as the measured average voltage increase in the first 14 periods of $(4.14 - 4.009) \text{ V} / 14 = 2.93 \text{ mV}$ ($< 0.3\%$ error). The non-linear terminal voltage increase in Fig. 8(a) can be explained by the gradual decrease in PV current with the gradually increasing operating voltage of the PV, as shown in Fig. 8(d), when the operating voltage of the PV is over the maximum power point. Repeating the experiment at the illuminating condition of 100 lux, the terminal voltage of the supercapacitor decreases as shown in Fig. 8(b). According to the proposed method, the

amount of charge that the PV provided in a measurement period at 100 lux (22.5 μA PV current) is calculated as $22.5 \mu\text{A} \times 150 \text{ s} = 3.375 \text{ mC}$, which is already less than the load discharge of 4.24 mC. As a consequence, the terminal voltage of the supercapacitor keeps decreasing in each measurement period. It should also be noted that the discharge rate in Fig. 8(b) decreases at the beginning and then it is almost constant after the terminal voltage becomes lower than 4.0V, which can be explained when considering the maximum power point of 4.0V at 100 lux, shown in Fig. 8(c).

In summary, the experimental results shown in Fig. 8(a) and Fig. 8(b) demonstrate that the supercapacitor storage can be accurately predicted by the newly proposed method, therefore the proposed method can be directly used for calculation of the storage capacity of a supercapacitor for IoT applications.

It is worth noting that the quiescent current of a commercially available power management chip is reported as 325 nA [22] and the developed application system using this chip (such as Bluetooth Low Power (BLE) beacon [23]) seems to have already provided a solution for indoor PV powered applications. However, when the illumination goes down to 250 lux, the reported PV harvested power of $\sim 200 \mu\text{W}$ cannot charge the adopted supercapacitor when the load power consumption is set as $180 \mu\text{W}$, even without considering the power consumption contributed by the leakage current of the supercapacitor. The reported operating illumination is 450 lux corresponding to an almost doubled harvesting power while the load is still set as $180 \mu\text{W}$. Since no quantitative calculation exists, it is reasonable to assume that 450 lux is the lowest usable operating illumination, suggesting that the reported power management solution cannot be utilised for sub-mW indoor PV energy harvesting. In contrast, the charge-based method reported in this paper can provide a feasible solution by direct calculation. The leakage current of the adopted supercapacitor is specified as 2.0 μA and the specified maximum current consumption of the charge management chip is 0.5 μA . When the operating voltage of the system is set as 4.0 V, the supercapacitor and the adopted simple charger chip consume a total power of $10 \mu\text{W}$; therefore, after powering the required $180 \mu\text{W}$ there is still $10 \mu\text{W}$ left for charging the supercapacitor. In fact, when the ultra-low-power power management chip reported in [22] is connected to the indoor PV panel, adopted in this paper, at 200 lux ($180 \mu\text{W}$ harvested power), the observed terminal voltage of the supercapacitor decreased even when there is no load applied, indicating that the supercapacitor is not charged at all.

C. Discussion

When a 0.5 F supercapacitor is charged at 50 mA current and then discharged at 50 mA current after 5 minutes, the recorded terminal voltage changes as shown in Fig. 9(a) (case A and case B). This clearly demonstrates the two charge redistribution processes which consume energy. In case A shown in Fig. 9(b), an exponential drop in the terminal voltage of 100 mV can be observed after 60s of charge. Similarly, in case B shown in Fig. 9(c) an exponential voltage rise can be observed. The supercapacitor is charged again at point C at 50 μA current and charging is stopped at point D shown in Fig. 9(d). The almost linear terminal voltage curve around C and D demonstrates that there is minute charge redistribution process. In practice at least

one charge redistribution process can be observed at the end of active mode in sub-mW indoor PV powered IoT applications. Charge redistribution incurred energy loss can be high. When considering that the energy loss of the charge redistribution between two identical capacitors can be as high as 50% when the initial charge condition is set as one fully charged and the other empty in charge, energy loss of the charge redistribution process must be taken into account for energy-based storage evaluation. Referring to Fig. 2, energy loss in charge redistribution process can be obtained using formula (2) as,

$$E_{loss} = \int_0^{n\tau} i_1^2(t) R_1 dt = \int_0^{n\tau} \left(\frac{(V_0 - V_1)^2}{R_1} e^{-\frac{2t}{\tau}} \right) dt$$

$$= \frac{(V_0 - V_1)^2}{R_1} \int_0^{n\tau} \left(e^{-\frac{2t}{\tau}} \right) dt \quad (8)$$

where $\tau = R_1 \frac{C_0 C_1}{C_0 + C_1}$ and $n = 3 \sim 5$, V_0 and V_1 are the initial voltage of the charge redistribution. The term $\int_0^{n\tau} \left(e^{-\frac{2t}{\tau}} \right) dt$ is constant for a given model after the completion of charge redistribution, so the energy loss is mainly determined by $(V_0 - V_1)$. If the initial charge state parameters of V_1 and V_0 are known, energy loss can be easily calculated as reported in [10]. In practical applications, $(V_0 - V_1)$ is usually unavailable. Even with a known charge current, $(V_0 - V_1)$ cannot be obtained, since when referring to Fig. 3, the initial charge state parameters of V_1 and V_0 in formula (8) are determined by the charge process as,

$$\begin{cases} \frac{C_0 V_0}{i_0} = \frac{C_1 V_1}{i_1} \\ I_{charge} = i_0 + i_1 \end{cases} \quad (9)$$

where i_0 and i_1 denote the currents flowing through capacitance C_0 and C_1 . Formula (9) has three unknown parameters in two equations so it has infinite solutions, making simulation the only possible way for energy-based storage evaluation. In contrast, the charge-based storage estimation method analyses the circuit in current-mode [24] using the amount of charge calculated by $I \times t$, which is more suitable for the PV powered applications, where PV cell is modelled as a current source. The proposed charge-based storage estimation treats the supercapacitor as a black-box to calculate the charge stored inside the supercapacitor through terminal current input/output. Since the manufacture provided leakage current has been linked to the supercapacitor model in Section II.B, no experiment is required to obtain the supercapacitor's model parameters and no simulation is required for the dynamically changing charge redistribution current.

It seems that using energy-based storage evaluation is a straightforward way for energy harvesting applications. However, using charge domain can make the case easier since, while energy is expressed by $i \times t \times V$, charge is expressed as $i \times t$, where V is the terminal voltage of the supercapacitor which changes non-linearly due to the charge redistribution process. Also when estimating storage via energy, the calculation terms used are $\frac{1}{2}CV^2$, $i_1^2 R_1 t$, while the terms used in charge evaluation are $I \times t$ and $C \times V$, so the proposed charge based method directly uses formulas for calculation while the energy based method

relies on simulations. This is supported by the fact that the charge-based method has been experimentally validated by simple recording and analysis of the terminal voltage of the supercapacitor, while validation of energy based methods (as presented in the literature) has not been reported yet. A full comparison of the charge and energy-based storage evaluation methods is listed in Table IV.

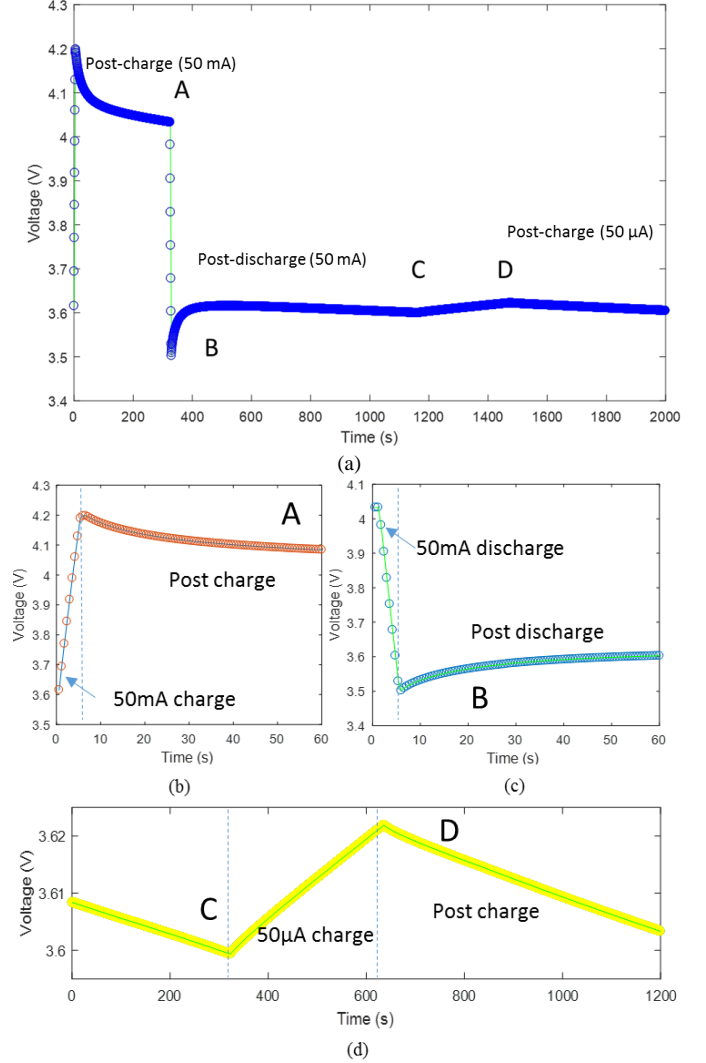


Fig 9. (a): Recorded terminal voltage of a 0.5F supercapacitor. Charge redistribution caused voltage changes can be observed at A (post charge of 50mA shown in (b)) and B (post discharge of 50 mA shown in (c)). No charge redistribution can be observed at D (post charge of 50 μ A beginning at C shown in (d)).

Table IV: Storage evaluation: Energy vs. Charge

	Reported energy-based methods [4, 9, 10,11]	This work (charge-based)
Model working mode	Voltage	Current
Estimation terms and their linearity	Energy ($\frac{1}{2}CV^2$, $i_1^2 R_1 t$)	Charge ($I \times t$, CV)
Model parameters required	Non-linear Yes (A set of R and C gained by further experiment)	linear No (Manufacture already provided)
Initial condition	Required	Not required
Estimation method	Full simulation	Direct calculation
Expt. validated	No	Yes
Practical to use	No	Yes

Analysis of a PV energy harvesting powered IoT node in the newly proposed current-mode also helps to explain the reason why there is almost no charge redistribution after the end of sleep mode. Referring to Fig. 6, the net charge current in sleep mode is $I_{e-c} = (I_{pv} - I_{leak} - I_{sleep})$, so when using formula (9) the maximum current flow through the C_1 branch in Fig. 3 is calculated as,

$$I_1 = \frac{C_1 V_1}{C_0 V_0 + C_1 V_1} \times I_{e-c}$$

$$= \frac{C_1}{C_0 \frac{V_0}{V_1} + C_1} \times I_{e-c} < \frac{C_1}{C_0 + C_1} \times I_{e-c} \quad (10)$$

due to $V_1 = V_0 - I_1 R_1 < V_0$. When using model parameters of ref [10] listed in Table I ($R_1 = 100 \Omega$, $C_0 = 8.44 \text{ F}$ and $C_1 = 3.44 \text{ F}$) and $I_{e-c} = (45-2-4) = 39 \mu\text{A}$, the current I_1 is calculated as $11.2 \mu\text{A}$ resulting in a 1.12 mV voltage difference between C_0 and C_1 . This tiny voltage difference corresponds to a maximum instant power loss of 12.67 nW at the beginning of the charge redistribution process and therefore the charge redistribution process is negligible in terms of storage energy loss. Similarly, when a 50 mA current is drawn from the supercapacitor in active mode, I_1 is calculated as less than 14.3 mA producing a $<1.43 \text{ V}$ voltage difference between C_0 and C_1 after the end of active mode. This large voltage difference results in 20.6 mW maximum instant power loss at the beginning of charge redistribution and therefore there is a considerable charge redistribution process at the end of active mode when energy loss is considered.

The estimated 1.43 V voltage difference is relatively high when considering that the voltage output is about 4.0 V . In practice, since the discharge time period in IoT applications is very limited (in the hundred ms range), even in the case of 1 s active period discharged at $I = 50 \text{ mA}$, the voltage difference is limited to 5.89 mV due to the small amount of discharge ($\Delta V < \frac{I \Delta t}{C_0}$). Therefore, terminal voltage drop caused by charge redistribution is not an issue for IoT applications when considering that the total amount of discharge is relatively small when compared to the total charge stored in the supercapacitor. It is also worth noting that the $2.0 \mu\text{A}$ leakage current of the $5.4 \text{ V } 0.5 \text{ F}$ supercapacitor is low even when compared to the ultra-low leakage current of $1.0 \mu\text{A}$ [25] measured from a coin Lithium battery of CP 1254 from Varta Microbattery GmbH. Therefore, as shown in Table V, the leakage current of the supercapacitor is not an issue in indoor sub-mW PV energy harvesting applications when comparing it with the PV current of $45 \mu\text{A}$ at 200 lux . It should also be highlighted that the leakage current of the $5.4 \text{ V } 1.0 \text{ F}$ supercapacitor from the same manufacturer is specified as $4.0 \mu\text{A}$, therefore the leakage current of the supercapacitor is proportional to the storage capacity. If a 10 F supercapacitor was adopted for a larger storage capacity, the estimated $40 \mu\text{A}$ leakage current would not be acceptable for the applications reported in this study.

Table V: Leakage current comparison of Li-battery and supercapacitor

	Supercap (5.4V 0.5F)	Li-Battery (CP 1254 50 mAH)
Specified leakage current (μA)	2.0	N/A
Measured leakage current (μA)	2.0	1.0 [25]
Percentage (leakage/PV current)	4.4%	2.2%

VI. CONCLUSION

Self-discharge has been the key concern preventing supercapacitors from being used as the sole storage component in sub-mW indoor PV energy harvesting powered IoT applications for lifetime battery-replacement-free solutions, because of the difficulty in evaluating the energy loss in the charge redistribution process, which occurs in every measurement period for IoT applications.

The proposed storage evaluation method provides a new view of calculating the total amount of charge stored in current-mode, using $I \times t$, successfully avoiding using the dynamically changing parameters of C and V for storage evaluation in the charge redistribution process. Time constant analysis and leakage current test experiments demonstrated that the manufacturer-specified tiny leakage current, although measured several days after charge, can be directly used in the charge based storage evaluation, making the proposed method straightforward without further requirements for acquiring model parameters of the supercapacitor or for determining the initial charge state.

Finally, the tiny leakage current of the supercapacitor at the required storage capacity for sub-mW indoor PV energy harvesting applications, as revealed by the proposed method, strongly supports that a supercapacitor can be the sole storage element for PV powered IoT nodes. Consequently, a solution is provided for lifetime battery-replacement-free applications.

REFERENCES

- [1] A Al-Fuqaha, M Guizani, M Mohammadi, *et al.*, "Internet of things: a survey on enabling technologies, protocols, and applications", IEEE Communication Surveys & Tutorials, vol. 17, no. 4, pp. 2347-2376, 2015
- [2] F Simjee and P Chou, "Efficient charging of supercapacitors for extended lifetime of wireless sensor nodes", IEEE Trans on Power Electronics, Vol. 23, no. 3, pp. 1526-1533, 2008
- [3] M Uno and K Tanaka, "Accelerated charge-discharge cycling test and cycle life prediction model for supercapacitors in alternative battery applications", IEEE Trans. on Industrial Electronics, vol. 59, no. 12, pp. 4704-4712, 2012
- [4] H Yang and Y Zhang, "Analysis of supercapacitor energy loss for power management in environmentally powered wireless sensor nodes", IEEE Trans on Power Electronics, vol. 28, no. 11, pp.5391-5403, 2013
- [5] T J Freeborn, B Maundy and A S Elwakil, "Measurement of supercapacitor fractional-order model parameters from voltage-excited step response", IEEE Journal on Emerging and Selected Topics in Circuits and Systems, vol. 3, no. 3, pp.367-376, 2013
- [6] R German, A Hammer, R Lallemand, *et al.*, "Novel experimental identification method for a supercapacitor multipore model in order to monitor the state of health", IEEE Trans on Power Electronics, vol. 31, no. 1, pp.548-559, 2016
- [7] T J Freeborn, B Maundy and A S Elwakil, "Measurement of supercapacitor fractional-order model parameters from voltage-excited step response", IEEE Journal on Emerging and Selected Topics in Circuits and Systems, vol. 3, no. 3, pp.367-376, 2013
- [8] M Kaus, J Kowal and D Sauer, "Modelling the effects of charge redistribution during self-discharge of supercapacitors", Electrochimica Acta, vol. 55, pp.7516-7523, 2010
- [9] V Sedlakova, J Sikula, J Majzner, *et al.*, "Supercapacitor equivalent electrical circuit model based on charge redistribution", Journal of Power Sources, 286: 58-65, 2015
- [10] R Chai, Y Zhang, "A practical supercapacitor model for power management in wireless sensor nodes", IEEE Trans on Power Electronics, vol. 30, no. 12, pp.6720-6730, 2015
- [11] Y Diab, P venet, H Gualous, *et al.*, "Self-discharge characterization and modelling of electrochemical capacitor used for power electronics applications", IEEE Trans. on Power Electronics, V24, n. 2, pp. 510-517, 2009

- [12] A Nasiri, S Zabalawi and G Mandic, "Indoor power harvesting using photovoltaic cells for low-power applications", *IEEE Trans. on Industrial Electronics*, vol. 56, no. 11, pp. 4502-4509, 2009
- [13] W Wang, T O'Donnell, N Wang, *et al.*, "Design considerations of sub-mW indoor light energy harvesting for wireless sensor systems", *ACM Journal on Emerging Technologies in Computing Systems*, vol. 6 n.2, pp.6:1-6:26, 2010
- [14] Y Wang, Y Liu, C Wang, *et al.*, "Storage-less and converter-less photovoltaic energy harvesting with maximum power point tracking for internet of things", *IEEE trans on Computer-Aided Design of Integrated Circuits and Systems*, Vol. 35, no. 2, pp. 173-186, 2016
- [15] X Yue, M Kauer, M Ballenger, *et al.*, "Development of an Indoor Photovoltaic Energy Harvesting Module for Autonomous Sensors in Building Air Quality Applications", *IEEE Internet of Things Journal*, vol. 4, no. 7, pp.2092-2103, 2017
- [16] X Yue, J Kiely, A Farooq, *et al.*, "Estimation of the dynamic leakage current of a supercapacitor in energy harvesting powered autonomous wireless sensor nodes", *Proceedings of IEEE International Telecommunications Energy Conference (INTELEC'17)*, pp.278-281, 2017
- [17] A Lewandowski, P Jakobczyk, M Galinski, *et al.*, "Self-discharge of electrochemical double layer capacitors", *Physical Chemistry Chemical Physics*, vol.15, pp. 8692—8699, 2013
- [18] A Weddell, G Merrett, T Kazmierski, *et al.*, "Accurate supercapacitor modeling for energy harvesting wireless sensor nodes", *IEEE Trans on Circuits and Systems-II: Express Briefs*, vol. 58, no. 12, pp. 911-915, 2011
- [19] Y Zhang and H Yang, "Modelling and characterization of supercapacitors for wireless sensor network applications", *Journal of Power Sources*, vol. 196, pp.4128-4135, 2011
- [20] V Sedlakova, J Sikula, J Majzner, *et al.*, "Supercapacitor equivalent electrical circuit model based on charge redistribution by diffusion", *Journal of Power Sources*, 286: 58-65, 2015
- [21] D Gibson and C MacGregor, "A novel solid state non-dispersive infrared CO₂ gas sensor compatible with wireless and portable deployment", *Sensors*, vol. 13, pp. 7079-7103, 2013
- [22] S Kim, R Vyas, J Bito, *et al.*, "Ambient RF energy-harvesting technologies for self-sustainable wireless sensor platforms", *Proceedings of the IEEE*, vol. 102, no. 11, pp. 1649-1666, 2014
- [23] Texas Instruments, Indoor light energy harvesting reference design for Bluetooth® Low Energy (BLE) beacon subsystem, 2014. Available from <http://www.ti.com/lit/ug/tidu235a/tidu235a.pdf>
- [24] J Mahattanakul and C. Toumazou, "Current-Mode Versus Voltage-mode G_m-C Biquad Filters: What the Theory Says", *IEEE Transactions on Circuits and Systems-II: Analog and Digital*, Vol. 45, No. 2, pp 173-186, 1998
- [25] X Yue, J Kiely, S. Ghauria, *et al.*, "A successive approximation method to precisely measure leakage current of the rechargeable Lithium coin battery", *Journal of Energy Storage*, vol. 13, pp.442-446, 2017



Xicai (Alex) Yue (M'14–SM'15) received the B.Eng. degree in telecommunication engineering, M.Eng. and Ph.D. degrees in biomedical engineering from Xi'an Jiaotong University, Xi'an, China.

He was a University Teaching Assistant and then a Lecturer in China since graduation. From 1999 to 2016, he was with Tsinghua University, Beijing, China, Imperial College London, London, U.K., and Sharp Laboratories of Europe, Oxford. He is currently a Senior Lecturer of bio-instrumentation and sensor interfacing with the University of the West of England, Bristol, U.K. He has authored or co-authored over 20 peer-reviewed journal papers

(as lead author) and a book chapter. His current research interests include active dry-electrodes for physiological measurements, low-power mixed-signal CMOS IC design for biomedical and wearable bio-sensing applications.

Dr Yue is an associate editor of the Elsevier's "Measurement" journal. He was a recipient of the Live Demo Special Session Award of the IEEE International Symposium on Circuits and Systems in 2007.



Exchange for the Faculty of Engineering. Since 2008, she has been the co-Director of the Institute of Bio-sensing Technology and since 2016, the Health Technology Hub at the University of the West of England, Bristol, UK. In 2014, she was a founder of a University spin out, MIAtech Biosolutions Limited.

Prof. Kiely is a Fellow of the Institute of Engineering and Technology (IET), UK and in 2015 she was awarded a Royal Academy of Engineering Enterprise Fellowship.



Des Gibson has over thirty years track record in industry, academic based research & development and successful physics based product commercialisation, gained globally with technical and managing director roles within blue chip organizations, small to medium sized companies, start-ups and close associations with academia. He has co-founded four successful physics based technology companies focussing on optical thin film & sensor technologies. Two most recent are; Gas Sensing Solutions Ltd - co-founded 2006 and a recent winner of both an Institute of Physics Innovation & a Shell Springboard awards - and Applied Multilayers Ltd, co-founded 2002, acquired 2010 by Telemark Inc, USA.

Motivated by fresh challenges and a desire to focus on research, September 2014 he joined the University of the West of Scotland (UWS) as professor in thin film & sensor technologies and is director & founder of the Institute of Thin Films, Sensors & Imaging (www.itfsi.com).



Emmanuel M. Drakakis (M'05) received the 4-year B.S. degree in Physics and the 2-year M.Phil. degree in Electronic Physics and Radioelectrology from Aristotle University of Thessaloniki, Macedonia, Greece, and the Ph.D. degree in analog IC design from Imperial College, London, U.K. Currently, he is Professor in Bio-Circuits and Systems with the Department of Bioengineering, Imperial College London. In this Department, he has founded the Bioinspired VLSI Circuits and Systems Group. He has authored or co-authored a large number of peer-reviewed papers and several book chapters. He is the recipient of many prizes for research excellence and is involved in several cross-disciplinary research projects. He is currently Associate Editor with *IEEE TRANSACTIONS ON BIOMEDICAL CIRCUITS AND SYSTEMS* (2007-to-date) and *Frontiers in Neuromorphic Engineering*. He is also Editor with *Measurement-Elsevier* and an Editorial Advisor with *BMC Biomedical Engineering*, Springer Nature. He has a cumulative editorial service to the research community of more than twenty-seven years.